

DS-D4218MI-070H(B) LED Poster Display (Vertical Design)



LED poster display adopts two-color alloy technique. This thin display features magnetic butterfly bezel design and supports seamless splicing of multiple screens. It can either be served as a single display or be horizontally spliced into a 1080p display. It presents videos with high brightness and high contrast. From whichever perspective, you can always enjoy excellent image quality. It supports various installation methods, such as conventional wall-mounting, decorative wall-mounting, hanging, tilt bracket mounting, and mobile base mounting.

- Even the thickest part of this thin display is only 28.1 mm or so. With two-color alloy splicing design and magnetic butterfly bezel design, it supports seamless splicing of multiple screens.
- Empowered by self-developed lossless image processing technology and ultra-low gray scale image control technology, it presents dynamic colors and delicate images with soft color.
- You can control and manage your content remotely via local storage, USB flash drive, mobile client, PC client, Hik-cloud, etc.
- Its modular system box supports quick maintenance or replacement of product system modules.
- When used in a single unit, it supports dynamic guidance and mobile phone mirroring. When spliced with two units, it can be used to display character ads. When spliced as a 2K splicing display, it can be directly connected to display a computer screen.
- It supports tilt bracket mounting, mobile two-color alloy base mounting, wall mounting, pendant mounting, and creative bracket mounting.
- HOB light board protection functions make it moisture-proof in humid regions and prevent it from falling over in crowded places.

Distributed by:

SCREENLINE
the screen makes the difference

▪ Specification

| Model | | DS-D4218MI-070H(B) |
|-------------------------------|-------------------------------|---|
| Product Model | Product Model | DS-D4218MI-070(B) |
| Cabinet | Pixel Configuration | SMD Triad LED |
| | Pixel Pitch Category | P1.8 |
| | Pixel Pitch | 1.875 mm |
| | Modules Component | Cabinet × 5, single cabinet (2 × 4) |
| | Dimensions (W × H × D) | 613 × 1695.5 × 68.1 mm (24.1 × 66.8 × 2.7 inch) |
| | Resolution | 320 × 900 |
| | Area | 1.0125 m ² |
| | Weight | 29 kg (64.0 lb.) |
| | Pixel Density | 284444 dots/m ² |
| | Lamp Board Housing | Without housing, glue potting |
| | Cabinet Material | Aluminum alloy |
| | Maintenance Method | Front maintenance for cabinet, and rear maintenance for system backpack |
| Display | White Balance Brightness | 600 cd/m ² |
| | Color Temperature | 3000 to 10000 K adjustable |
| | Viewing Angle | Horizontal 160°, vertical 160° |
| | Contrast Ratio | ≥ 3000:1 |
| | Color Uniformity | ± 0.003 Cx, Cy |
| | Brightness Uniformity | ≥ 97% |
| Processing Performance | Driving Method | Constant current driving |
| | Frame Frequency | 60 Hz |
| | Refresh Rate | Up to 3840 Hz |
| | Grey Level | Up to 16 bit |
| Power | Power Supply | 110 to 220 VAC ± 15% |
| | Max. Consumption | ≤ 345 W/m ² |
| | Average Consumption | < 115 W/m ² |
| Working Environment | Working Temperature | -10 to 40 °C (14 to 104 °F) |
| | Working Humidity | 10% to 60% RH (non-condensing) |
| | Storage Humidity | 10% to 85% RH (non-condensing) |
| | Storage Temperature | -20 to 60 °C (-4 to 140 °F) |
| General | Package Dimension (W × H × D) | 1831 × 1082 × 246 mm (72.1 × 42.6 × 9.7 inch) |
| | Gross Weight | 69 kg (152.12 lb.) |
| | Packing List | Power cord × 1, HDMI × 1, Wi-Fi antenna × 2 |

Distributed by:

SCREENLINE
the screen makes the difference

HIKVISION



Planned release

Multiple templates



All-in-one design

- Built-in LED controller
- Information-releasing system

Flexible deployment

Support max. 10 pieces of self-splicing with only HDMI cables.

Practical advertising

Manage advertising programs with HikCentral FocSign, supporting scheduled release, multiple templates, etc.

| Model | DS-D4212MI-070H(B) | DS-D4215MI-070H(B) | DS-D4218MI-070H(B) |
|------------|--------------------|--------------------|--------------------|
| pixel (mm) | 1.25 | 1.5625 | 1.875 |


Distributed by:

SCREENLINE
the screen makes the difference

▪ Available Model

DS-D4218MI-070H(B)

▪ Dimension

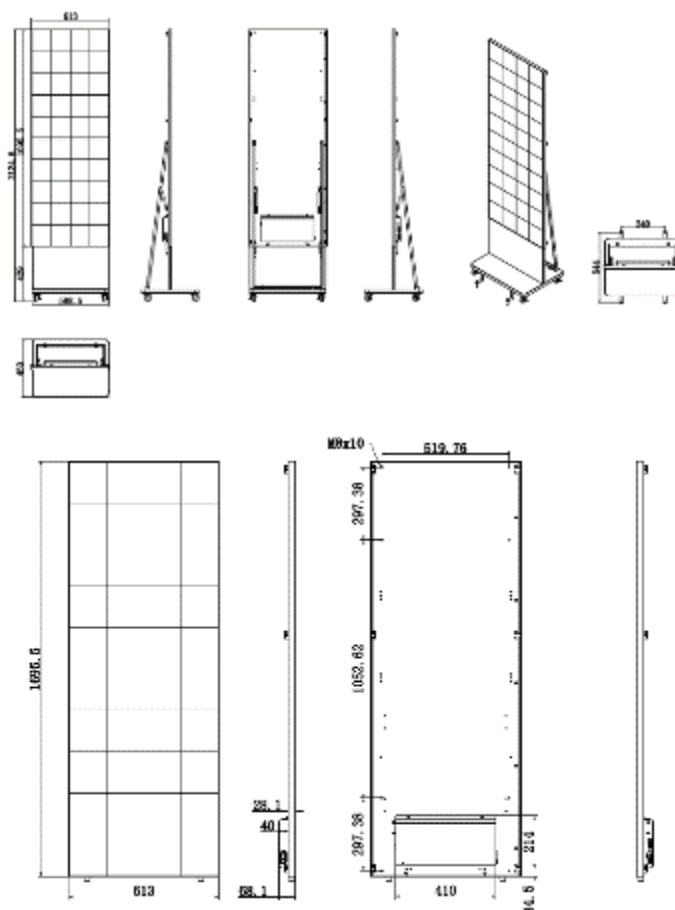

Unit: mm

▪ Accessory

▪ Included

LED Poster Display—Tilt Bracket



Distributed by:

SCREENLINE
the screen makes the difference

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global

Hikvision
Corporate Channel

hikvisionhq

©Hikvision Digital Technology Co., Ltd. 2022 | Data subject to change without notice |

Distributed by:

SCREENLINE
the screen makes the difference



Via Nazionale, 1/n - 1/u 38060 Besenello (TN) | +39 0464 830003 | info@screenline.it | screenline.it