

DS-D6043FL-B/S Standing Digital Signage



- Metallic Appearance Light weight body with integrative design. The front high-transmittance tempered glass provides reliable protection.
- Exquisite Image Industrial A+ interface, auto-coloring and image-enhancing engine.
- Variable Materials Static and dynamic materials, including pictures, audio, video, scrolling subtitle, PDF, webpage, live video, number calling, pop-up pictures, etc.
- Flexible Program Schedule Free schedule and district display of multiple materials. Multiple play modes with customization support.
- Centralized Management Remotely control and manage one or more screens, such as timed startup/shutdown, quick startup/shutdown, brightness/volume timed adjustment, and screenshot preview. Remote program release and local (USB) program update.
- Organization Permission 5-level organization available for managing materials, programs, terminals, and users. Create custom user with precise permission assignment. Multiple permission templates available.
- Multiple Security Safeguards 3-level check of materials, programs, and schedules to prevent mistake release. Screensaver password to protect displaying. Encryption of data storage and transmission to avoid data tampering. With no default password, users can activate and set initial password to guarantee the password safety.




▪ Specification

Model		DS-D6043FL-B/S
Display	Viewing Angle	178°(H) /178°(V)
	Contrast Ratio	1200:1
	Screen Size	42.5 inch
	Active Display Area	529.254 (H) mm × 940.896 (V) mm
	Backlight	LED
	Pixel Pitch	0.163 (H) mm × 0.490 (V) mm
	Resolution	1920 × 1080
	Brightness	500 cd/m ²
	Color Depth	8 bit, 16.7 M
	Response Time	8 ms
	Color Gamut	72% NTSC
	Reliability	7 × 24 H
	Refresh Rate	60 Hz
	Built-in System	Operation System
Processor		Cortex-A17, 4-core, main frequency 1.6 GHz
Memory		2 GB
Built-in Storage		8 GB(EMMC), 32 GB TF card
Interface	Network Interface	LAN × 1, Wi-Fi
	Data Transmission Interface	USB 2.0 × 2, BT 4.0 × 1
Internal Function	Loudspeaker	2 × built-in speaker, 8 Ω 5 W
Working Environment	Storage Temperature	10% to 80%
	Storage Humidity	5% to 90% RH
General	Material Type	DAT, MPG, VOB, TS, AVI, MKV, MP4, MOV, 3GP, TS, FLV, WEBM, ASF, MP1, MP2, MP3, WMA, WAV, OGG, OGA, FLAC, ACC, M4A, XMF, MXMF, RTTTL, RTX, OTA, IMY, JPG, JPEG, BMP, GIF, PNG
	Power Supply	100 to 240 VAC, 50/60 Hz
	Power Consumption	≤ 150 W
	Standby Consumption	≤ 10 W
	Working temperature	0 °C to 40 °C (32°F to 104 °F)
	Working humidity	10% to 80% RH
	Product Dimensions (W × H × D)	Without base: 589.74 mm × 1717 mm × 55 mm (23.22" × 67.60" × 2.17") With base: 589.74 mm × 1800 mm × 450 mm (23.22" × 70.87" × 17.72")
	Package Dimensions (W × H × D)	1935 mm× 765 mm × 303 mm (76.18" × 30.12" × 11.93")
	Net weight	48.46 kg (106.84 lb.)
	Gross weight	63.46 kg (139.91 lb.)
	Packing List	Screen, Base, Key, Screw Kit, Installation Manual

▪ Available Model

DS-D6043FL-B/S

Dimension

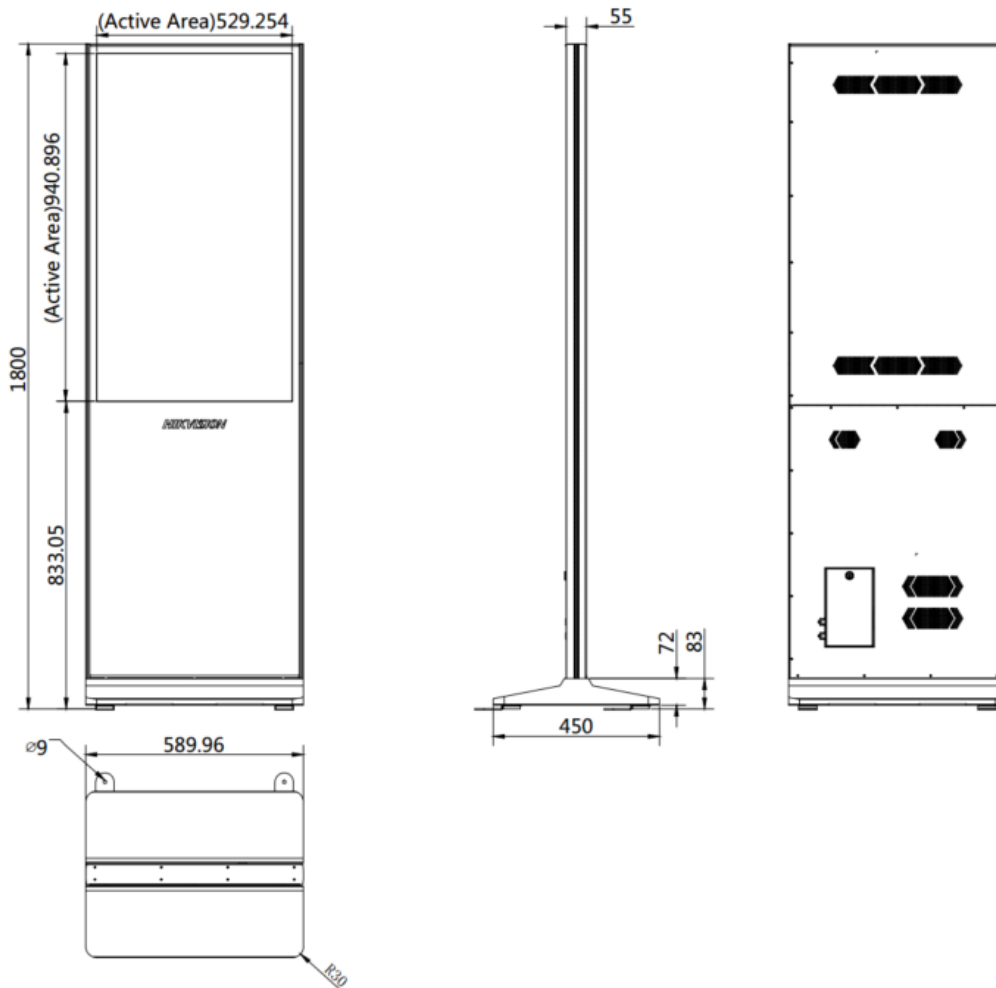

Distrib

HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 [216]521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com